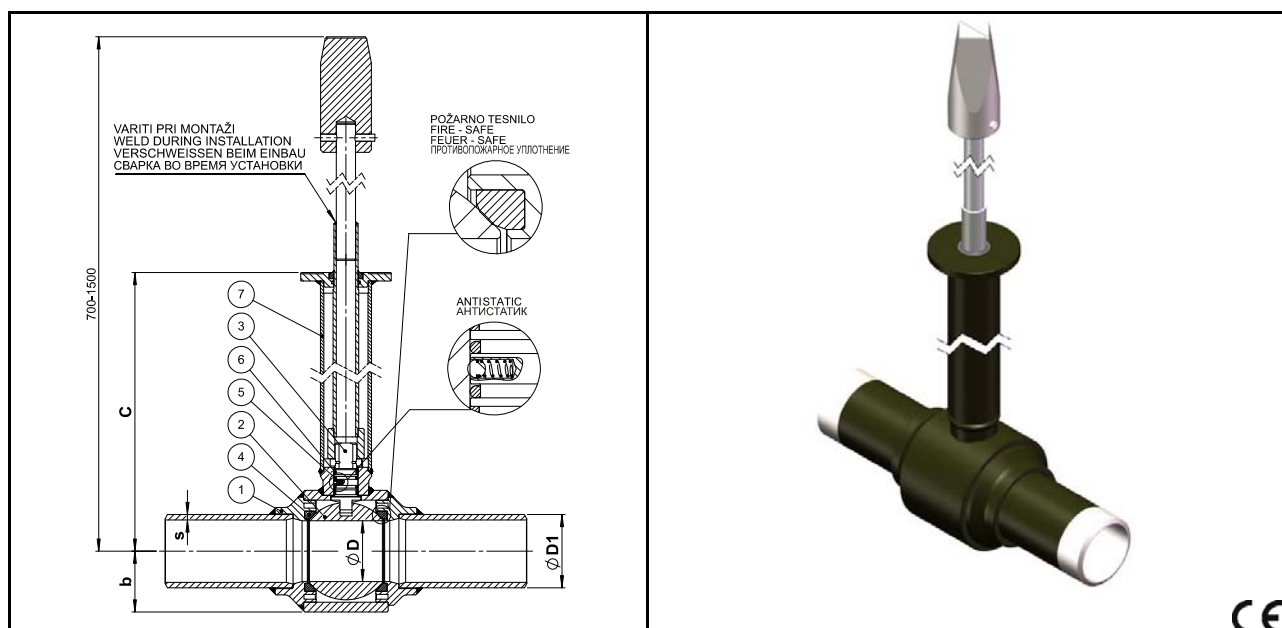


BALL VALVE KPV-G**FULL BORE, UNDERGROUND INSTALLATION, TELESCOPIC, DN25–DN250****GAS****Working temperature -20 °C/+60 °C****Materials**

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10
3	Stem	Stainless Steel – X20Cr13
4	Seats	PTFE
5	O-Ring	Viton
6	Leading ring	Turcite
7	Stem extension – telescopic	Carbon Steel – P235TR1, A105

KPV-G DN ... PN40 DU VX PX PG0 K24-30**PN40**

Art. nr.	DN	A	B	C	ØD	ØD1	s	Weight (kg)
A957543	25	270	33	379	25	33,7	4,05	4,4
A957544	32	270	35	384,5	32	42,4	2,6	5,7
A957545	40	270	41	390	40	48,3	2,6	6,5
A957546	50	300	50	400	50	60,3	4,5	8,2
A957547	65	360	65	402,5	63,5	76,1	2,9	13,6
A957548	80	390	75	412	78	88,9	3,2	17,9
A957549	100	450	93	422	99	114,3	3,6	33
A957550	125	525	115	436	124	139,7	4,0	63,5
A957551	150	600	135	453	149	168,3	4,5	73,5

☐ TRUNION MOUNTED BALL
Notes

DN65 to DN150 with spring loaded washers.
Antistatic and fire safe design.

