


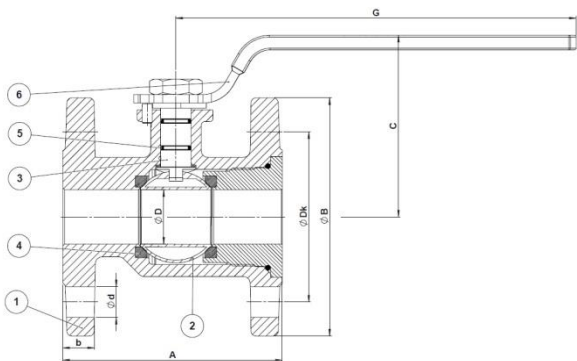


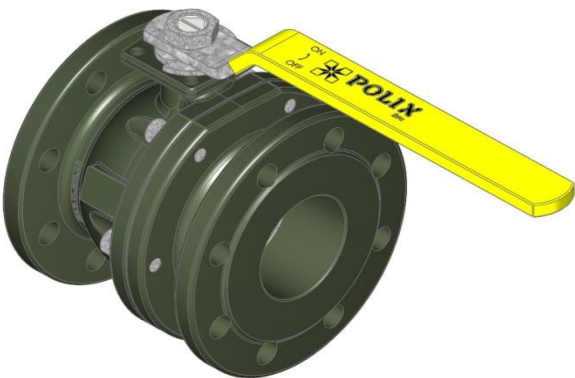

DN25-DN50

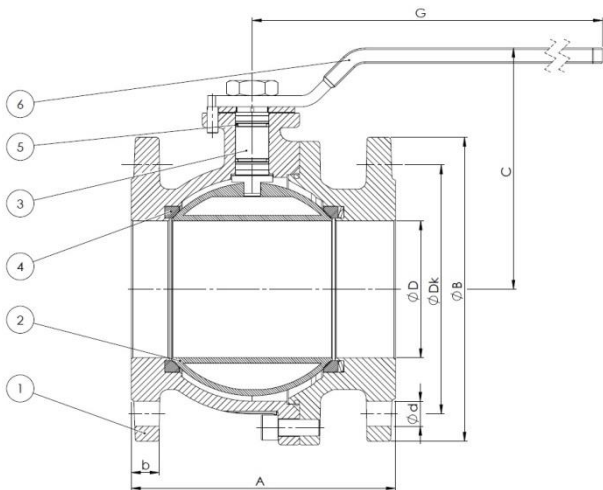

DN65-DN150

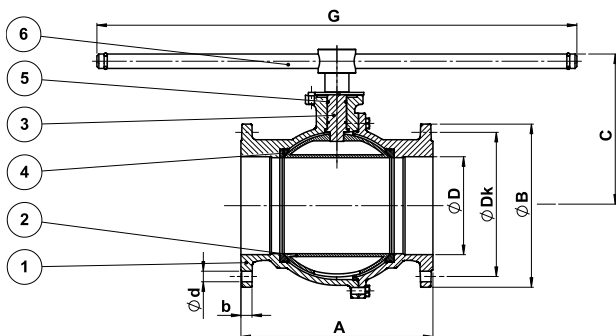

DN200



Working temperature -20 °C/+60 °C

Materials

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Brass – CuZn40Pb2 (Ms 58)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised) – S235JR (RSt 37-2)

KPC-G DN ... PN16 DP VX PB - ISO

**PN16**

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A954158	15	115	95	67	16	157	17	65	14	4	F03	11 x 13,5	2,00
A954159	20	120	105	74	20	157	18	75	14	4	F03	11 x 13,5	3,30
A954160	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,60
A954161	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A954162	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A954163	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90
A954164	65	170	185	124	63	288	18	145	18	4	F07	17 x 23	14,70
A954165	80	180	200	133	76	288	20	160	18	8	F07	17 x 23	20,10
A954166	100	190	220	153	100	288	20	180	18	8	F07	17 x 23	26,00
A954167	125	200	250	183	125	541	22	210	18	8	F10	22 x 27	31,00
A954168	125	325*	250	183	125	541	22	210	18	8	F10	22 x 27	50,00
A954169	150	210	285	203	150	541	22	240	22	8	F10	22 x 27	38,00
A954170	150	350*	285	203	150	541	22	240	22	8	F10	22 x 27	69,50
A954012	200	400*	340	316	200	1000	24	295	22	12	F12	K30	86,00

Notes

Face to face dimensions conform to DIN3202 F4.

*Face to face dimensions conform to DIN3202 F5.



Working temperature -20 °C/+60 °C

Materials

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised) – S235JR (RSt 37-2)

KPC-G DN ... PN16 DP VX PX - ISO



PN16

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A954203	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,60
A954204	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A954205	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A954206	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90
A954207	65	170	185	124	63	288	18	145	18	4	F07	17 x 23	14,70
A954208	80	180	200	133	76	288	20	160	18	8	F07	17 x 23	20,10
A954209	100	190	220	153	100	288	20	180	18	8	F07	17 x 23	26,00
A954210	125	200	250	183	125	541	22	210	18	8	F10	22 x 27	31,00
A954213	125	325*	250	183	125	541	22	210	18	8	F10	22 x 27	50,00
A954211	150	210	285	203	150	541	22	240	22	8	F10	22 x 27	38,00
A954214	150	350*	285	203	150	541	22	240	22	8	F10	22 x 27	69,50
A954212	200	400*	340	316	200	1000	24	295	22	12	F12	K30	86,00

Notes

Face to face dimensions conform to DIN3202 F4.

*Face to face dimensions conform to DIN3202 F5.

