
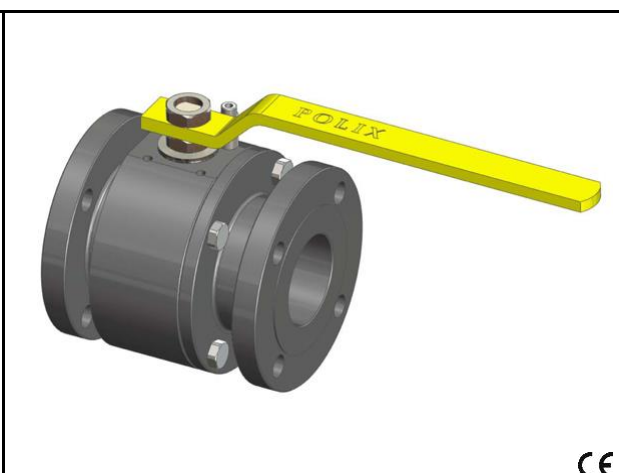


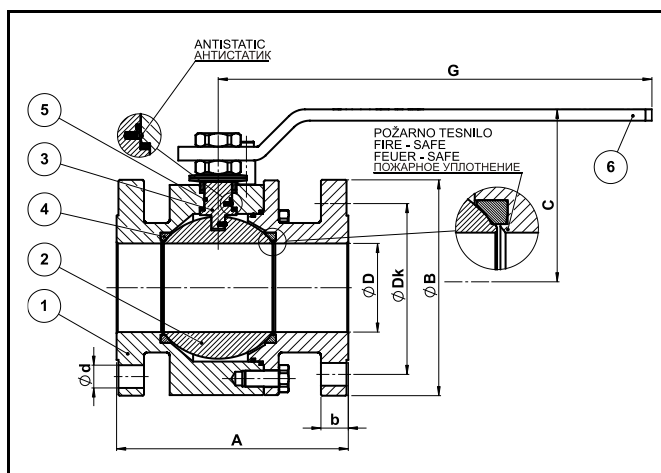

Working temperature -20 °C/+60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

KPF-G DN ... AN150 DP VX PX

ANSI Class 150

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Weight (kg)
A956023	25	127	110	90	25	180	14,5	79,5	16	4	6,00
A956025	40	165	130	120	40	360	17,5	98,5	16	4	12,00
A956026	50	178	150	130	50	360	19,5	120,5	20	4	17,50
A956028	80	203	190	150	78	460	24,0	152,5	20	4	28,50
A956029	100	229	230	165	99	460	24,0	190,5	20	8	46,50
A956034	150	394	280	–	149	–	25,5	241,5	22	8	161,50
A956040*	200	457	343	–	200	–	30	298,4	22	8	153,50

KPF-G DN ... AN300 DP VX PX

ANSI Class 300

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Weight (kg)
A956063	25	165	125	90	25	180	17,5	89,0	20	4	7,50
A956065	40	191	155	120	40	360	21,0	114,5	22	4	15,00
A956066	50	216	165	130	50	360	22,5	127,0	20	8	21,00
A956068	80	283	210	150	78	460	29,0	168,5	22	8	40,50
A956069	100	305	255	165	99	460	32,0	200,0	22	8	64,00
A956071	150	403	320	–	149	–	37,0	270,0	22	12	225,00
A956080*	200	502	381	–	200	–	42,5	330	25,5	12	179,50

☐ TRUNION MOUNTED BALL AND SPRING LOADED WASHERS

Notes

DN150-200 are with manual gearbox.

Antistatic and fire safe design.

*Welded construction.

