
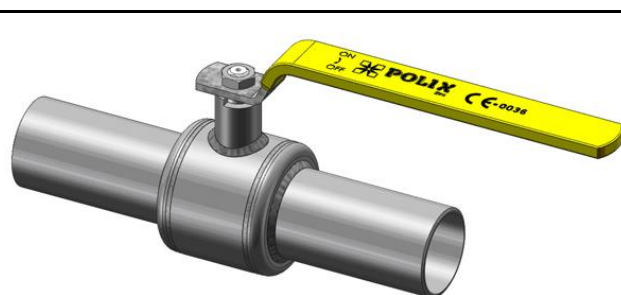


BALL VALVE KPT-G, WELDED FULL BORE, DN15–DN300

GAS

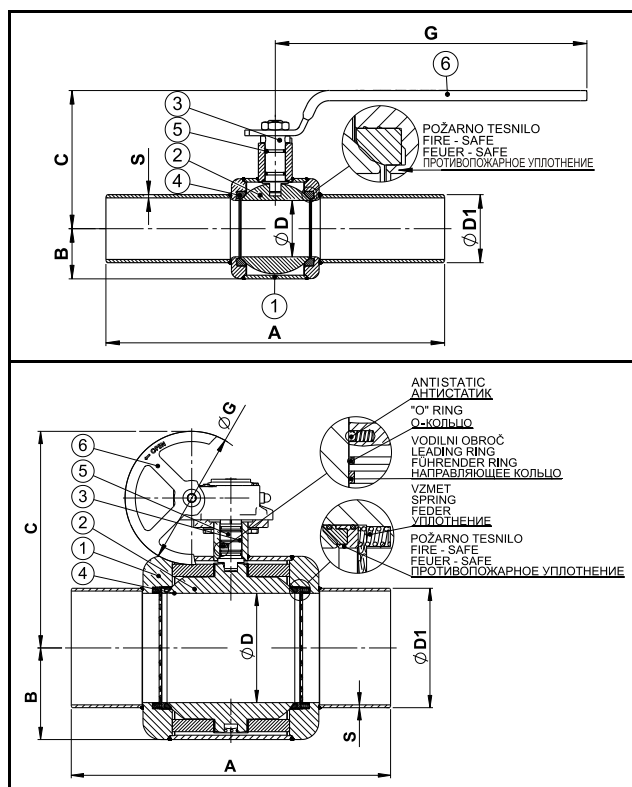

DN15–DN200

CE



DN250–DN300

CE

Working temperature -20 °C/+60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

KPT-G DN ... PN16 DU VX PX

PN16

Art. nr.	DN	A	B	C	ØD	ØD1	G	S	Weight (kg)
A958021	15	270	16,9	72,4	15,9	21,3	161	2,6	0,71
A958022	20	270	21,2	82,6	20	26,9	161	2,6	0,95
A958023	25	270	24,2	90,3	25	33,7	161	2,6	1,34
A958024	32	270	30,2	108,3	31	42,4	237	2,9	2,40
A958025	40	270	38,1	116	40	48,3	276	2,9	3,63
A958026	50	300	44,5	122,5	50	60,3	276	2,9	5,33
A958027	65	360	57,2	148,6	63,5	76,1	340	3,2	10,28
A958028	80	390	69,9	160,6	78	88,9	340	3,2	15,68
A958029	100	450	84,2	174,6	99	114,3	340	3,6	19,86
A958030	125	525	109,6	219	125	139,7	545	4,0	26,74
A958031	150	600	136,5	246	150	168,3	545	4,5	40,23
A958032	200	600	177,8	348	200	219,1	1000	6,3	80,41
A958033	250	730	209,5	495	250	273,0	Ø305	6,3	254,50
A958134	300*	850	209,5	495	250	323,9	Ø305	7,1	260,30

Notes

Face to face dimensions conform to DIN3202 F14.

Fire safe design.

DN250 and DN300: - trunion mounted ball
- spring loaded washers
- antistatic design
- manual gearbox

*DN300 – reduced bore.

