


**BALL VALVE KPT-G, WELDED-THREADED
FULL BORE, DN15-DN50**

GAS

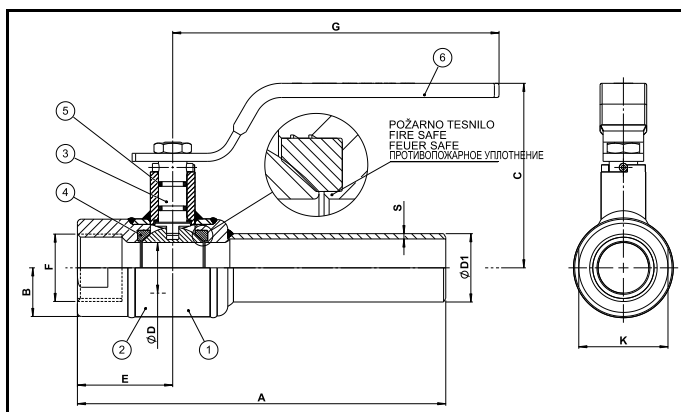

Working temperature: -20 °C/+60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

KPT-G DN ... PN40 DU-DN PX PX

PN40

Art. nr.	DN	A	B	C	ØD	ØD1	E	F	G	K	S	Weight (kg)
A958891	15	169	16,9	71,6	15,8	21,3	34	G 1/2"	161	32	2,6	0,7
A958892	20	174	21,2	82,6	20	26,9	39	G 3/4"	161	40	2,6	0,8
A958893	25	182	24,2	90,3	25	33,7	47	G 1"	161	44	2,6	1,4
A958894	32	189	30,2	108,3	31	42,4	52	G 1 1/4"	237	56	2,9	1,8
A958895	40	196	38,1	116	40	48,3	61	G 1 1/2"	276	70	2,9	4,2
A958896	50	221,5	44,5	122,5	50	60,3	71,5	G 2"	276	82	2,9	5

Notes

Fire safe design.

