


**BALL VALVE KPT-G, THREADED**  
**FULL BORE, DN15-DN50**

**GAS**

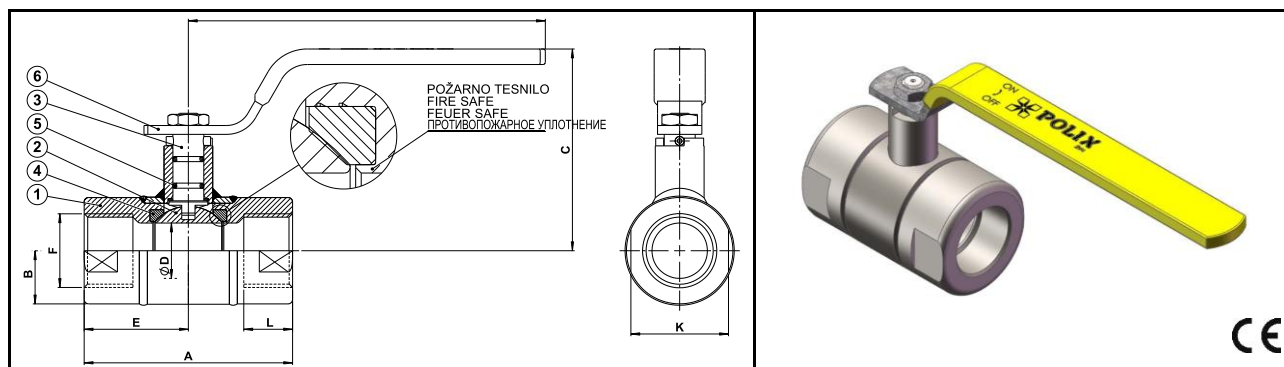

**Working temperature: -20 °C/+60 °C**

**Materials**

|   |        |                                                     |
|---|--------|-----------------------------------------------------|
| 1 | Body   | Carbon Steel – A105, P235TR2                        |
| 2 | Ball   | Stainless Steel – X5CrNi18-10 (A304)                |
| 3 | Stem   | Stainless Steel – X20Cr13 (A420)                    |
| 4 | Seats  | PTFE                                                |
| 5 | O-Ring | Viton                                               |
| 6 | Handle | Carbon steel (Galvanised), option S235JR (RSt 37-2) |

**KPT-G DN ... PN40 DN VX PX**

**PN40**

| Art. nr. | DN | A   | B    | C     | ØD   | E    | F     | G   | K  | L  | Weight (kg) |
|----------|----|-----|------|-------|------|------|-------|-----|----|----|-------------|
| A958751  | 15 | 68  | 16,9 | 71,6  | 15,8 | 34   | G ½"  | 161 | 32 | 17 | 0,5         |
| A958752  | 20 | 78  | 21,2 | 82,6  | 20   | 39   | G ¾"  | 161 | 40 | 18 | 0,8         |
| A958753  | 25 | 94  | 24,2 | 90,3  | 25   | 47   | G 1"  | 161 | 44 | 22 | 1,4         |
| A958754  | 32 | 104 | 30,2 | 108,3 | 31   | 52   | G 1¼" | 237 | 56 | 22 | 1,8         |
| A958755  | 40 | 121 | 38,1 | 116   | 40   | 61   | G 1½" | 276 | 70 | 24 | 4,0         |
| A958756  | 50 | 143 | 44,5 | 122,5 | 50   | 71,5 | G 2"  | 276 | 82 | 27 | 5,4         |

**Notes**

Fire safe design.

