
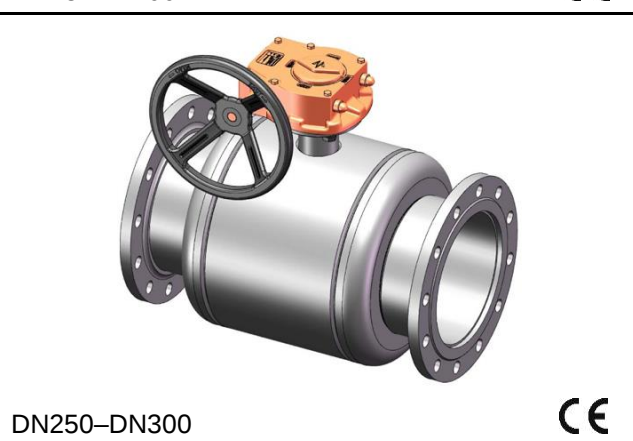
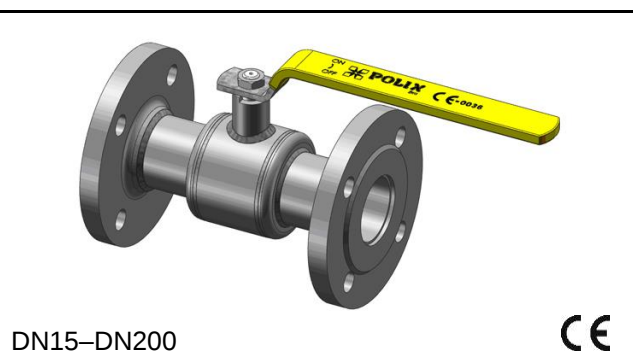


BALL VALVE KPT-G, FLANGED FULL BORE, DN15–DN300

GAS

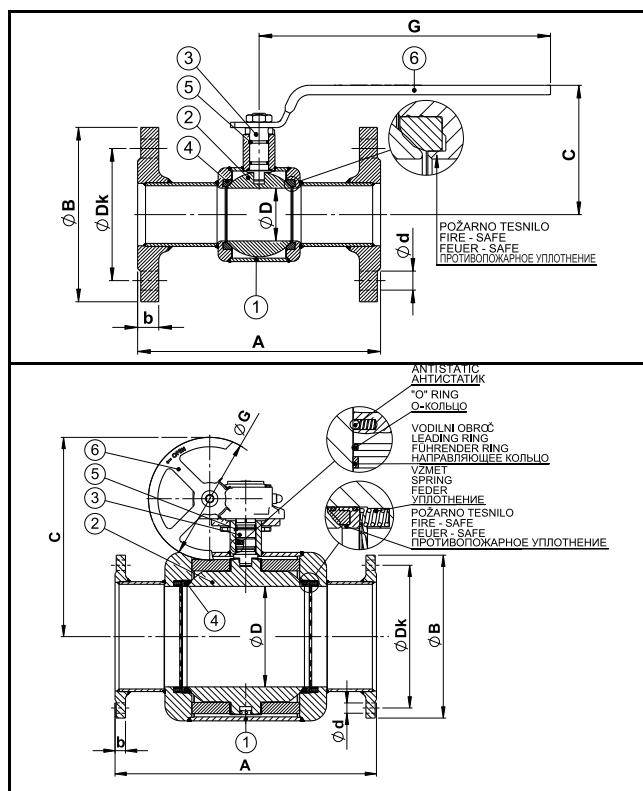

Working temperature: -20 °C/+60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	Viton
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

KPT-G DN ... PN16 DP VX PX

PN16

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Weight (kg)
A958221	15	130	95	71,6	15,9	161	16	65	14	4	1,96
A958222	20	150	105	82,6	20	161	18	75	14	4	2,73
A958223	25	160	115	90,3	25	161	18	85	14	4	3,49
A958224	32	180	140	108,3	31	237	18	100	18	4	5,62
A958225	40	200	150	116	40	276	18	110	18	4	7,23
A958226	50	230	165	122,5	50	276	20	125	18	4	8,96
A958227	65	290	185	148,6	63,5	340	22	145	18	8	16,45
A958228	80	310	200	160,6	78	340	24	160	18	8	23,42
A958229	100	350	235	174,6	99	340	24	190	22	8	29,91
A958230	125	400	270	219	125	545	26	220	26	8	40,24
A958231	150	450	300	246	150	545	28	250	26	8	52,43
A958232	200	550	375	348	200	1000	34	320	30	12	98,17
A958233	250	650	405	495	250	Ø305	26	355	26	12	274,50
A958334	300*	750	460	495	250	Ø305	28	410	26	12	287,30

Notes

Face to face dimensions conform to DIN3202 F17.

Fire safe design.

DN250 and DN300: - trunion mounted ball
- spring loaded washers
- antistatic design
- manual gearbox

*DN300 – reduced bore.

