


FULL BORE, UNDERGROUND INSTALLATION, DN25–DN200

GAS

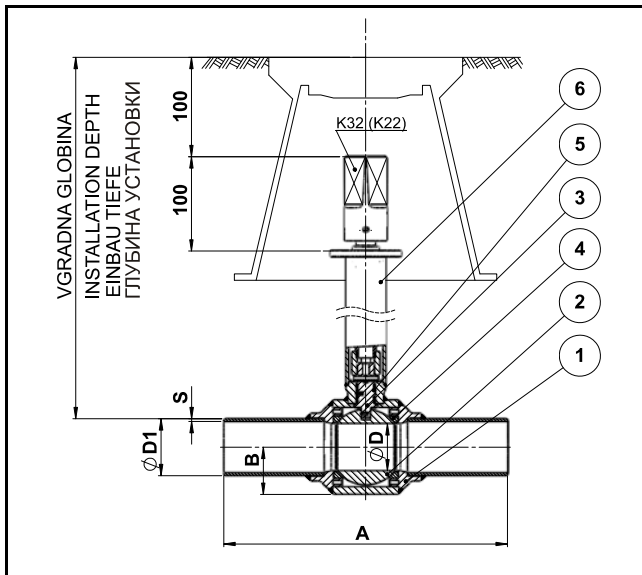

CE

Working temperature -20 °C / +60 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10
3	Stem	Stainless Steel – X20Cr13
4	Seats	PTFE
5	O-Ring	Viton
6	Stem extension	Carbon Steel – P235TR1, A105

KPV-G DN ... PN40 DU VX PX PG0 K22

PN40

Art. nr.	DN	A	B	ØD	ØD1	s	Weight (kg)
A957133	25	270	33	25	33,7	2,6	9,00
A957134	32	270	35	32	42,4	2,6	10,50
A957135	40	270	41	40	48,3	2,6	12,00
A957136	50	300	50	50	60,3	2,9	17,00
A957137	65	360	65	63,5	76,1	2,9	22,50
A957138	80	390	75	78	88,9	3,2	27,50
A957139	100	450	93	99	114,3	3,6	42,00

KPV-G DN ... PN40 DU VX PX PG0 S27

PN40

Art. nr.	DN	A	B	ØD	ØD1	s	Weight (kg)
A957140	125	525	115	124	139,7	4,0	71,00
A957141	150	600	135	149	168,3	4,5	100,00
A957142	200	600	176	200	219,1	6,3	161,00



TRUNION MOUNTED BALL

KPV-G DN ... PN40 DU VX PX PG0 K32

PN40

Art. nr.	DN	A	B	ØD	ØD1	s	Weight (kg)
A957183	25	270	33	25	33,7	2,6	9,00
A957184	32	270	35	32	42,4	2,6	10,50
A957185	40	270	41	40	48,3	2,6	12,00
A957186	50	300	50	50	60,3	2,9	17,00
A957187	65	360	65	63,5	76,1	2,9	22,50
A957188	80	390	75	78	88,9	3,2	27,50
A957189	100	450	93	99	114,3	3,6	42,00
A957190	125	525	115	124	139,7	4,0	71,00
A957191	150	600	135	149	168,3	4,5	100,00



TRUNION MOUNTED BALL

Notes

Installation depth is 1 m or as per request. DN65 to DN200 with spring loaded washers.
Antistatic and fire safe design.



POLIX