


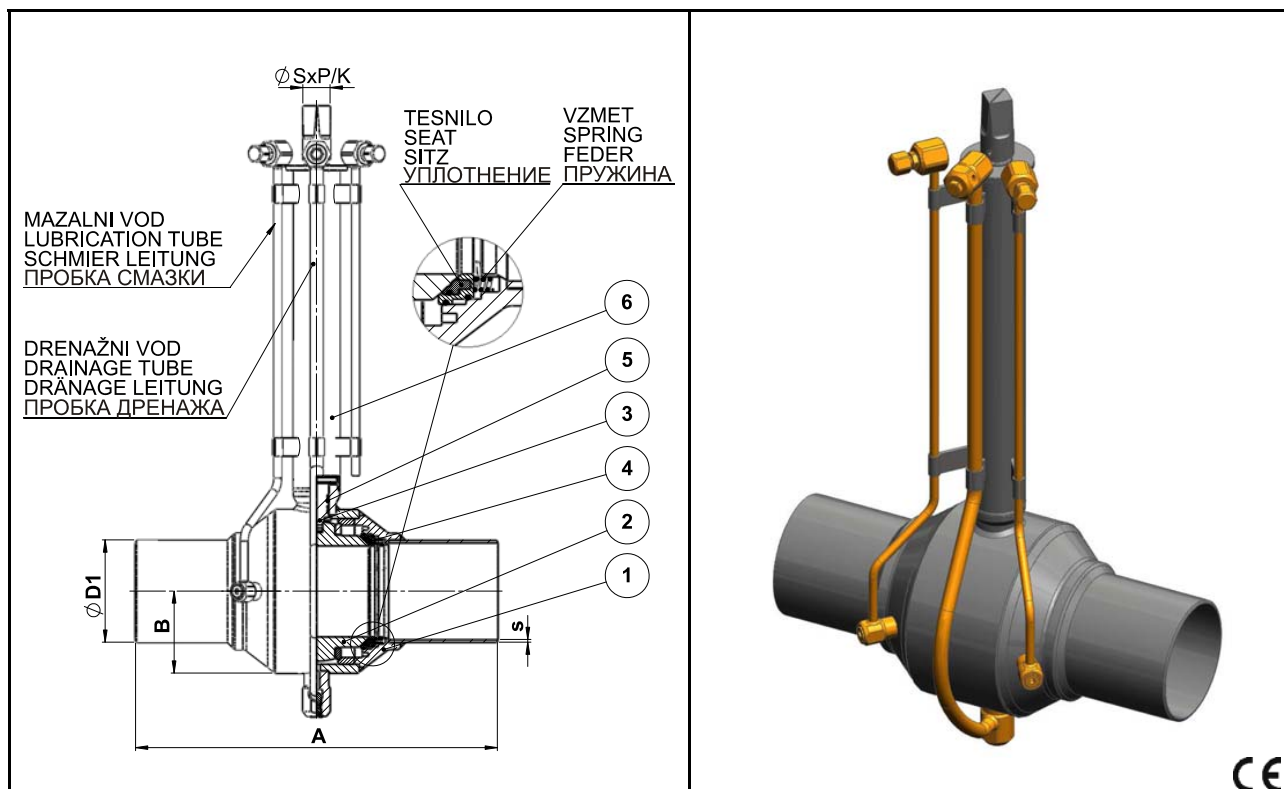

**Working temperature -20 °C/+60 °C**

**Materials**

|   |                |                               |
|---|----------------|-------------------------------|
| 1 | Body           | Carbon Steel – A105, P235TR2  |
| 2 | Ball           | Stainless Steel – X5CrNi18-10 |
| 3 | Stem           | Stainless Steel – X20Cr13     |
| 4 | Seats          | PTFE                          |
| 5 | O-Ring         | Viton                         |
| 6 | Stem extension | Carbon Steel – P235TR1, A105  |

**KPV-G DN ... PN16 DU VX PX PG0 K32 I1 ST**

**PN16**

| Art. nr. | DN  | A   | B  | ØD | ØD1   | s   | Shaft<br>ØSxP/K | Weight (kg) |
|----------|-----|-----|----|----|-------|-----|-----------------|-------------|
| A905466  | 80  | 390 | 75 | 78 | 88,9  | 4,0 | K32             | 32,50       |
| A905280  | 100 | 450 | 93 | 99 | 114,3 | 5,0 | K32             | 47,00       |

**KPV-G DN ... PN16 DU VX PX PG0 F.. I1 ST\*\***

**PN16**

| Art. nr. | DN   | F.. | A   | B   | ØD  | ØD1   | s   | Shaft<br>ØSxP/K | Weight (kg) |
|----------|------|-----|-----|-----|-----|-------|-----|-----------------|-------------|
| A905365  | 100  | F07 | 450 | 93  | 99  | 114,3 | 5,0 | 19x13           | 54,00       |
| A905281  | 150  | F12 | 600 | 135 | 149 | 168,3 | 4,5 | 23,8x19         | 76,00       |
| A905179  | 200* | F12 | 600 | 176 | 200 | 219,1 | 6,3 | K30             | 105,00      |
| A905223  | 250* | F12 | 730 | 176 | 200 | 273,0 | 7,1 | K30             | 166,00      |

☐ TRUNION MOUNTED BALL

**Notes**

Antistatic and fire safe design. DN80 to DN250 with spring loaded washers.

\*DN250 – reduced bore.

\*\*With manual gearbox.

