


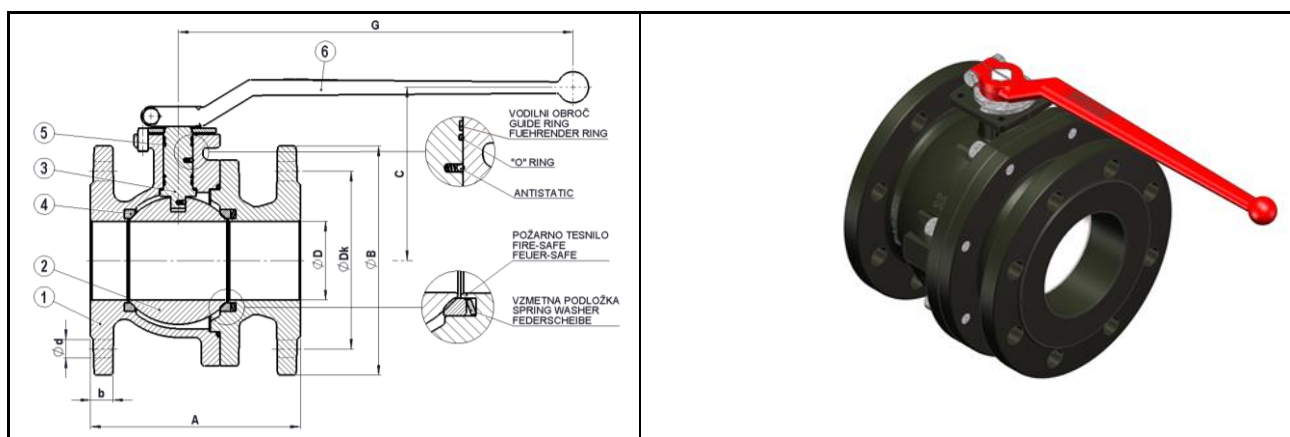

Working temperature: -10 °C/+100 °C

Materials

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	Brass – CuSn5Pb5ZN5
5	O-Ring	NBR
6	Handle	Forged Aluminium – Al6061, option S235JR (RSt 37-2)

KPN DN ... PN16 DP NX MX

PN16

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft ØSxP/K	Weight (kg)
A950176	25	125	115	83	25	158	18	85	14	4	F04	14x10	3,80
A950178	32	130	140	102	32	180	18	100	18	4	F05	17,8x14	5,80
A950179	40	140	150	107	40	180	18	110	18	4	F05	17,8x14	7,00
A950456	50	150	165	120,5	50	210	20	125	18	4	F05	K14	9,70
A950457	65	170	185	140	63,5	320	18	145	18	4	F07	K17	14,63
A950458	80	180	200	151	78	320	20	160	18	8	F07	K17	20,11
A950459	100	190	220	166	99	320	20	180	18	8	F07	K17	27,37
A950460	125	325	250	201	124	500	22	210	18	8	F10	K22	55,27
A950461	150	350	285	218	149	500	22	240	22	8	F10	K22	73,62

Notes

Face to face dimensions conform to DIN3202 F18.
 Antistatic and fire safe design.

