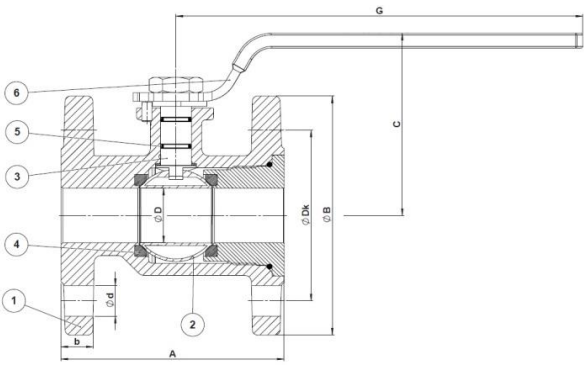
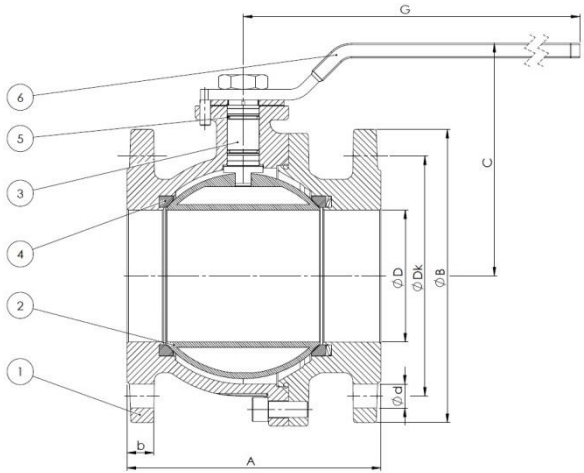
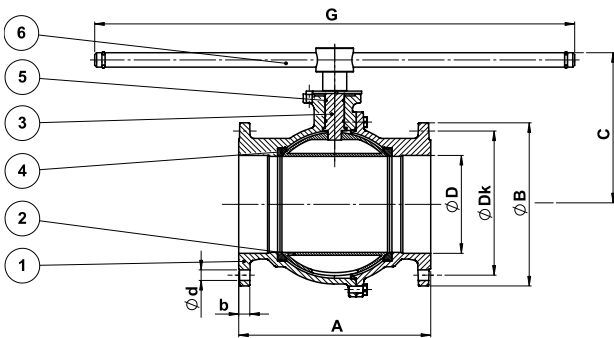


BALL VALVE KPC - ISO
FULL BORE, DN25–DN200

	 DN25–DN50 CE
	 DN65–DN150 CE
	 DN200 CE

Working temperature -10 °C/+100 °C**Materials**

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Brass – CuZn40Pb2 (Ms 58)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	NBR
6	Handle	Carbon steel (Galvanised) – S235JR (RSt 37-2)

KPC DN ... PN16 DP NX PB - ISO**PN16**

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A954243	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,30
A954244	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A954245	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A954246	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90
A954247	65	170	185	124	63	288	18	145	18	4	F07	17 x 23	14,70
A954248	80	180	200	133	76	288	20	160	18	8	F07	17 x 23	20,10
A954249	100	190	220	153	100	288	20	180	18	8	F07	17 x 23	26,00
A954250	125	200	250	183	125	541	22	210	18	8	F10	22 x 27	31,00
A954333	125	325*	250	183	125	541	22	210	18	8	F10	22 x 27	50,00
A954331	150	210	285	203	150	541	22	240	22	8	F10	22 x 27	38,00
A954334	150	350*	285	203	150	541	22	240	22	8	F10	22 x 27	69,50
A954332	200	400*	340	316	200	1000	24	295	22	12	F12	22 x 27	84,00

KPC DN ... PN40 DP NX PB - ISO**PN40**

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A952063	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,50
A952064	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,30
A952065	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,60
A952066	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,80

Working temperature -10 °C/+150 °C**Materials**

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Brass – CuZn40Pb2 (Ms 58)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	EPDM
6	Handle	Carbon steel (Galvanised) – S235JR (RSt 37-2)

KPC DN ... PN16 DP EX PB - ISO**PN16**

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A953013	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,30
A953015	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A952017	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A952018	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90
A952019	65	170	185	124	63	288	18	145	18	4	F07	17 x 23	14,70
A952020	80	180	200	133	76	288	20	160	18	8	F07	17 x 23	20,10
A952021	100	190	220	153	100	288	20	180	18	8	F07	17 x 23	26,00
A952022	125	200	250	183	125	541	22	210	18	8	F10	22 x 27	31,00
A952050	125	325*	250	183	125	541	22	210	18	8	F10	22 x 27	50,00
A952023	150	210	285	203	150	541	22	240	22	8	F10	22 x 27	38,00
A952053	150	350*	285	203	150	541	22	240	22	8	F10	22 x 27	69,50
A952024	200	400*	340	316	200	1000	24	295	22	12	F12	22 x 27	86,00

KPC DN ... PN40 DP EX PB - ISO**PN40**

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A953013	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,30
A953015	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A952017	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A952018	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90

Working temperature -10 °C/+180 °C

Materials

1	Body	Ductile Iron – EN-GJS-400-15 (GGG40)
2	Ball	Brass – CuZn40Pb2 (Ms 58)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	PTFE
6	Handle	Carbon steel (Galvanised) – S235JR (RSt 37-2)

KPC DN ... PN6 DP PX PB - ISO

PN6

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød/M**	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A952206	25	125	100	76	25	150	18	75	11/M10	4	F03	11 x 13,5	3,30
A952207	32	130	120	92	31	235	18	90	14/M12	4	F04	14 x 18	5,40
A952203	40	140	130	97	39	235	18	100	14/M12	4	F05	14 x 18	6,70
A952204	50	150	140	105	49	271	20	110	14/M12	4	F05	14 x 18	8,90
A952200	65	170	160	124	63	288	18	130	14	4	F07	17 x 23	14,70
A952201	80	180	190	133	76	288	20	150	18	4	F07	17 x 23	20,10
A952202	100	190	210	153	100	288	20	170	18	4	F07	17 x 23	26,00
A952205	125	200	240	183	125	541	22	200	M16	8	F10	22 x 27	31,00
A952208	150	210	265	203	150	541	22	225	M16	8	F10	22 x 27	38,00

Notes

**M – thread

KPC DN ... PN16 DP PX PB - ISO

PN16

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A953014	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,30
A953016	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A952029	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A952030	50	150	165	105	49	271	20	125	18	4	F05	14 x 18	8,90
A952031	65	170	185	124	63	288	18	145	18	4	F07	17 x 23	14,70
A952032	80	180	200	133	76	288	20	160	18	8	F07	17 x 23	20,10
A952033	100	190	220	153	100	288	20	180	18	8	F07	17 x 23	26,00
A952034	125	200	250	183	125	541	22	210	18	8	F10	22 x 27	31,00
A952051	125	325*	250	183	125	541	22	210	18	8	F10	22 x 27	50,00
A952035	150	210	285	203	150	541	22	240	22	8	F10	22 x 27	38,00
A952054	150	350*	285	203	150	541	22	240	22	8	F10	22 x 27	69,50
A952036	200	400*	340	316	200	1000	24	295	22	12	F12	K30	86,00

KPC DN ... PN40 DP PX PB - ISO

PN40

Art. nr.	DN	A	ØB	C	ØD	G	b	ØDk	Ød	Nr.	Top flange ISO	Shaft K x h	Weight (kg)
A953014	25	125	115	76	25	150	18	85	14	4	F03	11 x 13,5	3,30
A953016	32	130	140	92	31	235	18	100	18	4	F04	14 x 18	5,40
A952029	40	140	150	97	39	235	18	110	18	4	F05	14 x 18	6,70
A952030	50	150	165	105	49	271	20	125	18	4	F05	17 x 23	8,90

Notes

Article numbers for DN25–DN50 are the same for PN16 and PN40 and are always declared as PN40.

Face to face dimensions conform to DIN3202 F4.

*Face to face dimensions conform to DIN3202 F5.

