


BALL VALVE KPA

FULL BORE, DN15–DN200

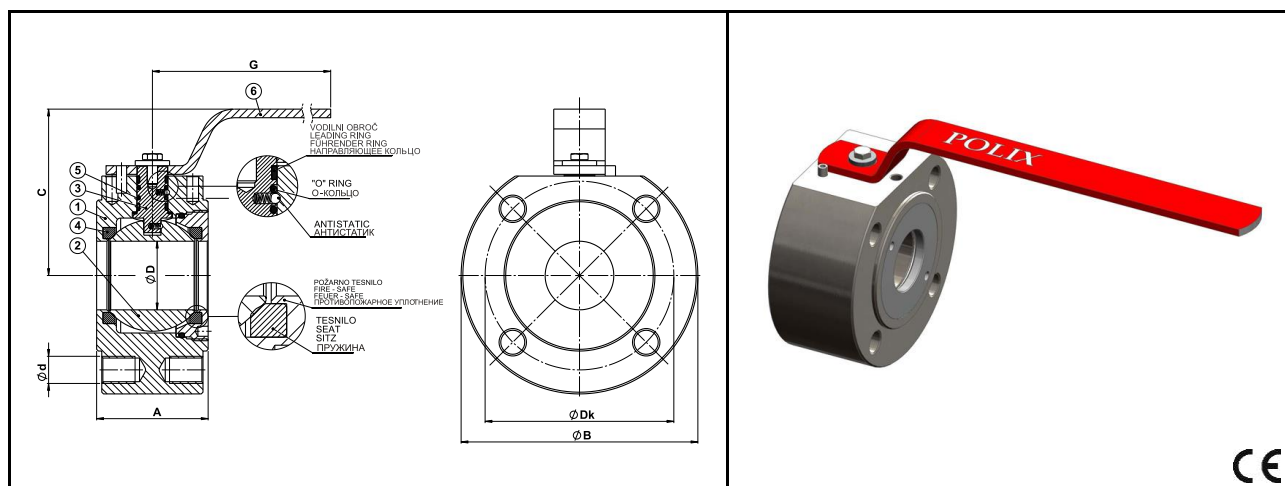

Materials

1	Body	Carbon Steel – A105
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	PTFE
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

Working temperature -10 °C/+180 °C

KPA DN ... PN16 DP PX PX

PN16

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	Weight (kg)
A955025	15	39	88	80	16	150	65	M12	4	2,80
A955026	20	39	98	80	20	150	75	M12	4	2,90
A955027	25	42	110	76	25	158	85	M12	4	3,00
A955028	32	55	130	108	32	180	100	M16	4	4,50
A955029	40	65	140	114	40	180	110	M16	4	6,50
A955030	50	80	150	128	50	222	125	M16	4	11,00
A955031	65	100	175	160	63,5	293	145	M16	4	15,00
A955032	80	120	190	170	78	293	160	M16	8	20,00
A955033	100	140	220	185	99	293	180	M16	8	28,50
A955010	125	175	296	194	125	541	210	M16	8	35,00
A955035	150	210	330	213	150	541	240	M20	8	97,00
A955036	200	270	435	310	200	1000	295	M20	12	179,00

KPA DN ... PN40 DP PX PX

PN40

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	Weight (kg)
A955025	15	39	88	80	16	150	65	M12	4	2,80
A955026	20	39	98	80	20	150	75	M12	4	2,90
A955027	25	42	110	76	25	158	85	M12	4	3,00
A955028	32	55	130	108	32	180	100	M16	4	4,50
A955029	40	65	140	114	40	180	110	M16	4	6,50
A955030	50	80	150	128	50	222	125	M16	4	11,00
A955060	65	100	175	160	63,5	293	145	M16	8	15,00
A955059	80	120	190	170	78	293	160	M16	8	20,00
A955086	100	140	220	185	99	293	190	M20	8	28,50

Notes

Article numbers for DN15–DN50 are the same for PN16 and PN40 are always declared as PN40.
Antistatic and fire safe design.

