


BALL VALVE KPT, WELDED **FULL BORE, DN15–DN250**

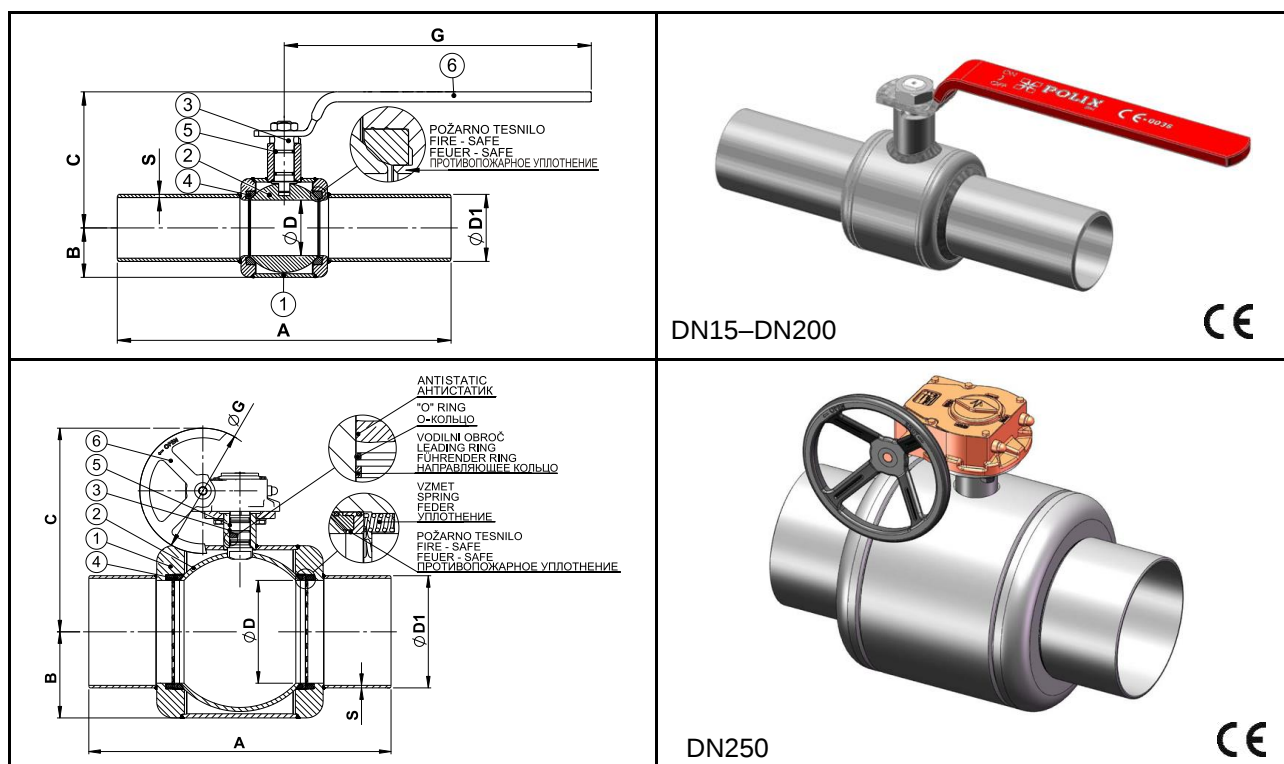

Working temperature -20 °C/+200 °C

Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X20Cr13 (A420)
4	Seats	PTFE
5	O-Ring	PTFE
6	Handle	Carbon steel (Galvanised), option S235JR (RSt 37-2)

KPT DN ... PN40 DU PX PX

Art. nr.	DN	A	B	C	ØD	ØD1	G	S	Weight (kg)
A958001	15	270	16,9	72,4	15,9	21,3	161	2,6	0,71
A958002	20	270	21,2	82,6	20	26,9	161	2,6	0,95
A958003	25	270	24,2	90,3	25	33,7	161	2,6	1,34
A958004	32	270	30,2	108,3	31	42,4	237	2,9	2,40
A958005	40	270	38,1	116	40	48,3	276	2,9	3,63
A958006	50	300	44,5	122,5	50	60,3	276	2,9	5,33
A958007	65	360	57,2	148,6	63,5	76,1	340	3,2	10,28
A958008	80	390	69,9	160,6	78	88,9	340	3,2	15,68
A958009	100	450	84,2	174,6	99	114,3	340	3,6	19,86
A958010	125	525	109,6	219	125	139,7	545	4,0	26,74
A958011	150	600	136,5	246	150	168,3	545	4,5	40,23
A958012	200	600	177,8	348	200	219,1	1000	6,3	80,41
A958013	250	730	209,5	495	250	273	Ø305	6,3	168,50

MAXIMUM ALLOWABLE PRESSURE: DN65-DN125 = 25 bar
 DN150-DN250 = 16 bar

Notes

Face to face dimensions conform to DIN3202 S14.

Fire safe design

DN250: - spring loaded washers
 - antistatic design
 - manual gearbox