
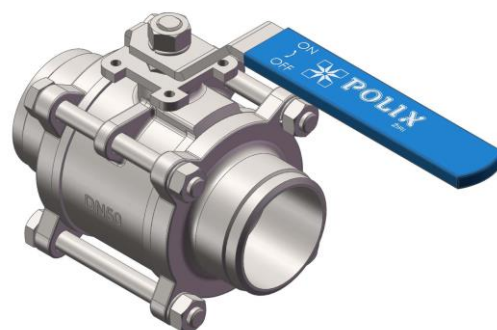


BALL VALVE KPS, WELDED **FULL BORE, DN10-DN100**

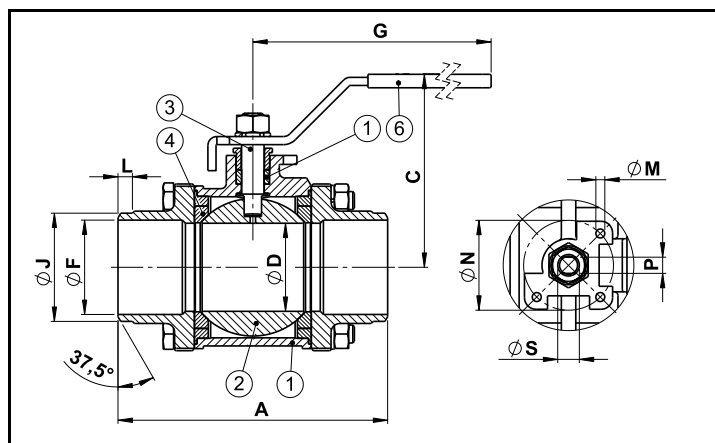

Working temperature: -20 °C/+200 °C

Materials

1	Body	Stainless Steel – GX5CrNiMo19-11 (A316)
2	Ball	Stainless Steel – GX5CrNiMo19-11 (A316)
3	Stem	Stainless Steel – X5CrNiMo17-12-2 (A316)
4	Seats	PTFE
5	Stem seal	PTFE
6	Handle	Carbon Steel – X5CrNi18-10

KPS DN ... PN63 DU PX PX

PN63

Art. nr.	DN	ISO 5211			P	ØS	A	C	G	ØD	ØF	ØJ	L	Weight (kg)
		F	ØN	ØM										
A059976	10	F04	42	M5	5	8	70	55	108	12,7	12,5	17,2	5	0,45
A028114	15	F04	42	M5	6,5	9,5	75	64	121	15	15,7	21,3	5	0,63
A028115	20	F04	42	M5	9,5	6,5	90	70	121	20	21	26,9	6	0,76
A028116	25	F04	42	M5	8	11	100	75	155	25	26,8	33,7	6	1,14
A028117	32	F04	42	M5	8	11	110	83	155	32	35,1	42,4	8	2,00
A028118	40	F05	50	M6	9	12,5	125	98	192	38	40,5	48,3	8	2,43

KPS DN ... PN40 DU PX PX

PN40

Art. nr.	DN	ISO 5211			ØP	ØS	A	C	G	ØD	ØF	ØJ	L	Teža (kg)
		F	ØN	ØM										
A028119	50	F05	50	M6	12,5	9	150	105	192	49	52,3	60,3	8	3,62
A066685	65	F07	70	M8	19	12	190	148	257	65,6	62,5	73	12	8,06
A012161	80	F07	70	M8	19	12	220	155	257	80	77,5	88,9	12	10,95
A070674	100	F10	102	M10	20	25	270	184	290	100	100	114,3	20	22,50

Notes

Where adapter is needed, choose it from KPN adapters.