


BALL VALVE KPS, THREADED **FULL BORE, DN15-DN65**

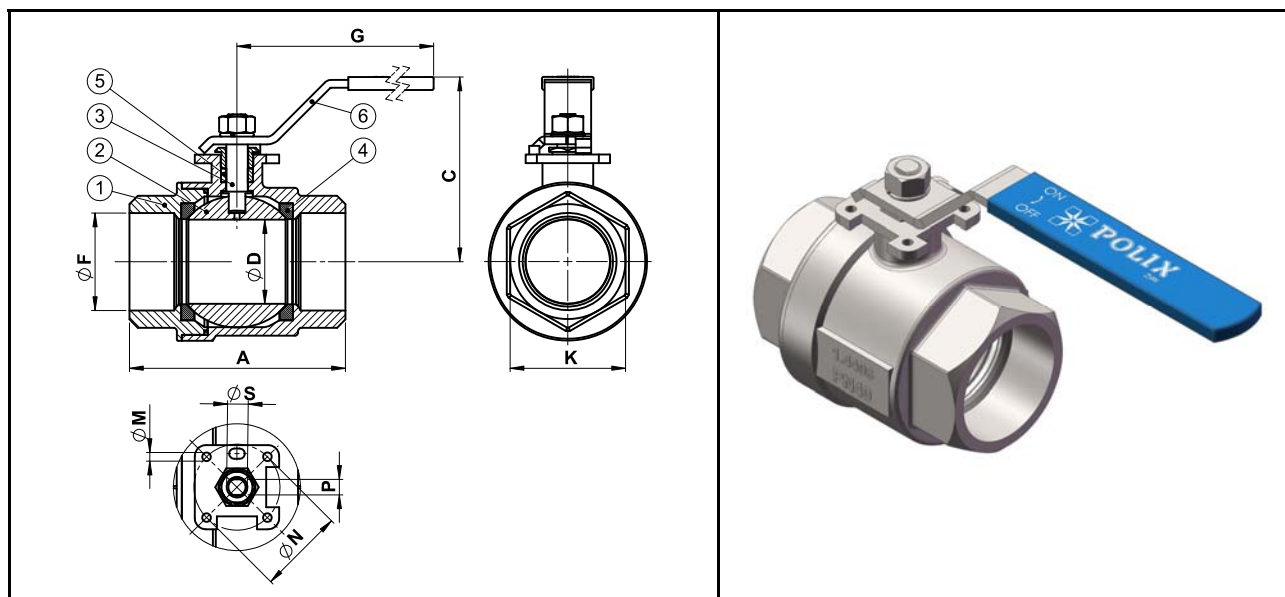

Working temperature: -20 °C/+200 °C

Materials

1	Body	Stainless Steel – GX5CrNiMo19-11 (A316)
2	Ball	Stainless Steel – GX5CrNiMo19-11 (A316)
3	Stem	Stainless Steel –X5CrNiMo17-12-2 (A316)
4	Seats	PTFE
5	Stem seal	PTFE
6	Handle	Carbon Steel – X5CrNi18-10

KPS DN ... PN63 DN PX PX

PN63

Art. nr.	DN	ISO 5211			P	ØS	A	ØF	G	ØD	C	Weight (kg)
		F	ØN	ØM								
A004062	15	F04	42	M5	5	8	66,4	G1/2	115	15	69	0,39
A004063	20	F04	42	M5	6,5	9,5	73,4	G3/4	115	20	77	0,54
A004064	25	F04	42	M5	8	11	84,8	G1	138	25	80	0,78
A004065	32	F04	42	M5	81	11	99,5	G1 1/4	163	32	86	1,27
A004066	40	F05	50	M6	9	12,5	112,7	G1 1/2	193	38	97	1,91

KPS DN ... PN40 DN PX PX

PN40

Art. nr.	DN	ISO 5211			P	ØS	A	ØF	G	ØD	C	Weight (kg)
		F	ØN	ØM								
A004067	50	F05	50	M6	9	12,5	129	G2	193	49	105	2,91
A028121	65	F07	70	M8	12	19	162,8	G2 1/2	248	65	141	6,21

Notes

Where adapter is needed, choose it from KPN adapters.

