


BALL VALVE KPAS FULL BORE, DN15–DN100

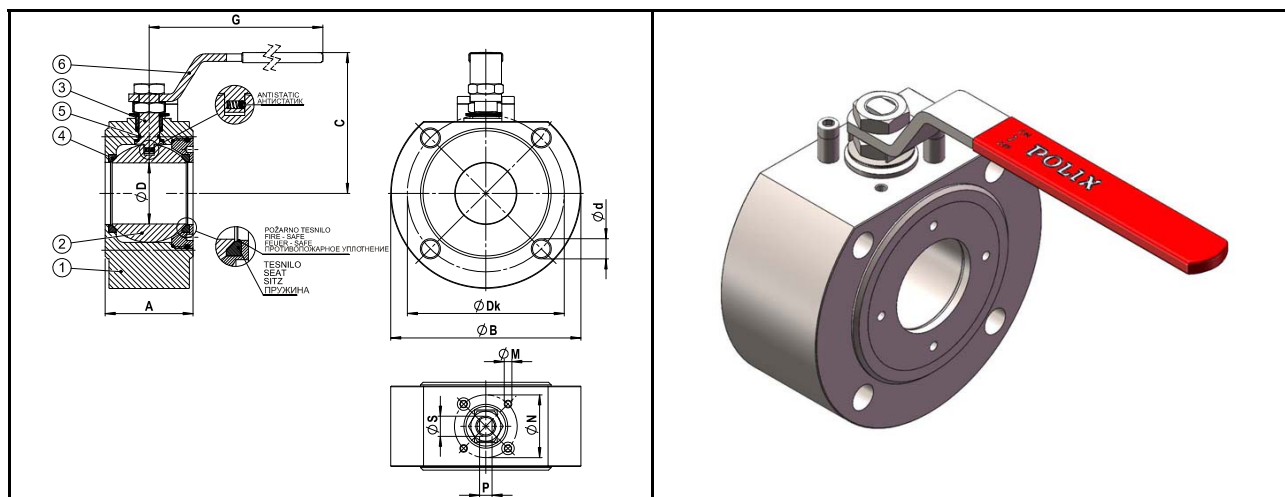

Working temperature: -10 °C/+180 °C

Materials

1	Body	Stainless Steel – AISI316 (1.4401; 1.4408)
2	Ball	Stainless Steel – X5CrNiMo17-12-2 (AISI316) 1.4401
3	Stem	Stainless Steel – AISI316 (1.4401)
4	Seats	PTFE
5	O-Ring	FPM (Viton)
6	Handle	Stainless steel AISI304

KPAS DN ... AN150 DP VX PX

ANSI 150

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	P	ØS	ISO 5211			Weight (kg)
												F	ØN	ØM	
A072406	15	35	89	65	15	160	60,5	1/2"	4	6	M10	F03	36	M5	1,24
A072407	20	38	98,5	70	20	160	70	1/2"	4	6	M10	F03	36	M5	1,65
A072408	25	43	108	82	25	200	79,5	1/2"	4	8	M12	F04	42	M5	2,45
A072409	32	54	118	85	32	207	89	1/2"	4	8	M12	F04	42	M5	3,67
A072410	40	60	127	102	40	260	98,5	1/2"	4	10	M16	F05	50	M6	4,66
A072411	50	70	165	110	50	265	120,5	5/8"	4	10	M16	F05	50	M6	5,80
A072412	65	95	185	137,5	65	380	139,5	5/8"	4	14	M22	F07	70	M8	10,35
A072413	80	122	200	150	78	395	152,5	5/8"	4	14	M22	F07	70	M8	13,90
A072414	100	140	220	165	96	440	190,5	5/8"	8	16	M27	F10	102	M10	20,00

KPAS DN ... AN300 DP VX PX

ANSI 300

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	P	ØS	ISO 5211			Weight (kg)
												F	ØN	ØM	
A072415	15	42	95,2	66	15	161	66,7	1/2"	4	6	M10	F03	36	M5	1,73
A072416	20	46	117,5	73	20	163	82,5	5/8"	4	6	M10	F03	36	M5	2,77
A072417	25	50	123,8	90	25	205	88,9	5/8"	4	8	M12	F04	42	M5	3,70
A072419	40	66	155,6	109	40	263	114,3	3/4"	4	10	M16	F04	42	M6	7,11
A072420	50	83	165,1	116	50	272	127	5/8"	8	10	M16	F05	50	M6	10,43

Notes

Possible with ATEX certificate.

