


BALL VALVE KPAC FULL BORE, DN15–DN200

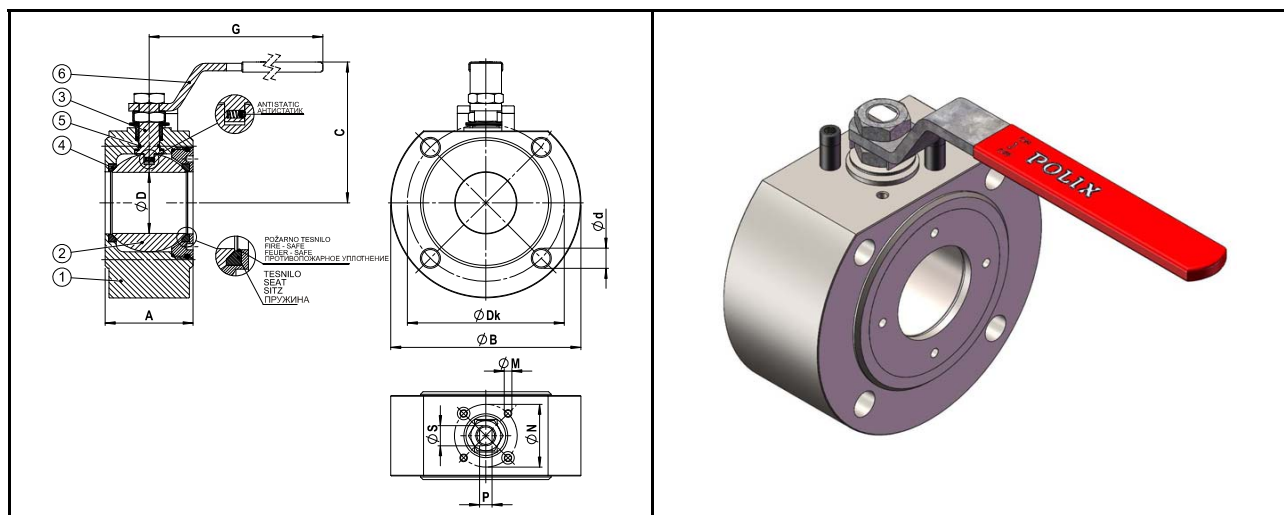

Working temperature: -10 °C/+180 °C

Materials

1	Body	Carbon Steel – A105
2	Ball	DN15–DN20 Stainless Steel – X5CrNiMo17-12-2 (AISI316) 1.4401
		DN > 25 Stainless Steel – X5CrNi18-10 (AISI304) 1.4301
3	Stem	Stainless Steel – X5CrNi18-10 (AISI304) 1.4301
4	Seats	PTFE
5	O-Ring	FPM (Viton)
6	Handle	Carbon Steel

KPAC DN ... PN16 DP VX PX

PN16

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	P	ØS	ISO 5211			Weight (kg)
												F	ØN	ØM	
A072365	15	35	90	65	15	140	65	M12	4	6	M10	F03	36	M5	1,35
A072366	20	38	100	70	20	140	75	M12	4	6	M10	F03	36	M5	1,81
A072367	25	43	110	82	25	180	85	M12	4	8	M12	F04	42	M5	2,51
A072368	32	54	130	85	32	180	100	M16	4	8	M12	F04	42	M5	4,33
A072369	40	60	140	102	40	230	110	M16	4	10	M16	F05	50	M6	5,54
A072370	50	70	150	110	50	230	125	M16	4	10	M16	F05	50	M6	7,30
A072371	65	95	175	137,5	65	333	145	M16	8	14	M22	F07	70	M8	15,00
A072372	80	122	190	150	78	333	160	M16	8	14	M22	F07	70	M8	20,67
A072373	100	154	220	167	96	370	180	M16	8	16	M27	F10	102	M10	34,5
A072374	125	185	255	181	118	370	210	M16	8	16	M27	F10	102	M10	54,20
A072375	150	235	295	249	144	584	240	M20	8	26	M42	F12	125	M12	90,57
A072376	200	310	373	288	192	584	295	M20	12	26	M42	F12	125	M12	177,06

KPAC DN ... PN40 DP VX PX

PN40

Art. nr.	DN	A	ØB	C	ØD	G	ØDk	Ød	Nr.	P	ØS	ISO 5211			Weight (kg)
												F	ØN	ØM	
A072377	15	35	90	65	15	140	65	M12	4	6	M10	F03	36	M5	1,35
A072378	20	38	100	70	20	140	75	M12	4	6	M10	F03	36	M5	1,81
A072379	25	43	110	82	25	180	85	M12	4	8	M12	F04	42	M5	2,51
A072380	32	54	130	85	32	180	100	M16	4	8	M12	F04	42	M5	4,33
A072381	40	60	140	102	40	230	110	M16	4	10	M16	F05	50	M6	5,54
A072382	50	70	150	110	50	230	125	M16	4	10	M16	F05	50	M6	7,30
A072383	65	95	175	137,5	65	333	145	M16	8	14	M22	F07	70	M8	15,00
A072384	80	122	190	150	78	333	160	M16	8	14	M22	F07	70	M8	20,67

Notes

Possible with ATEX certificate.

