


GATE VALVE – RESILIENT SEATED – OVAL BODY – NON RISING STEM – F5

DN40–DN500

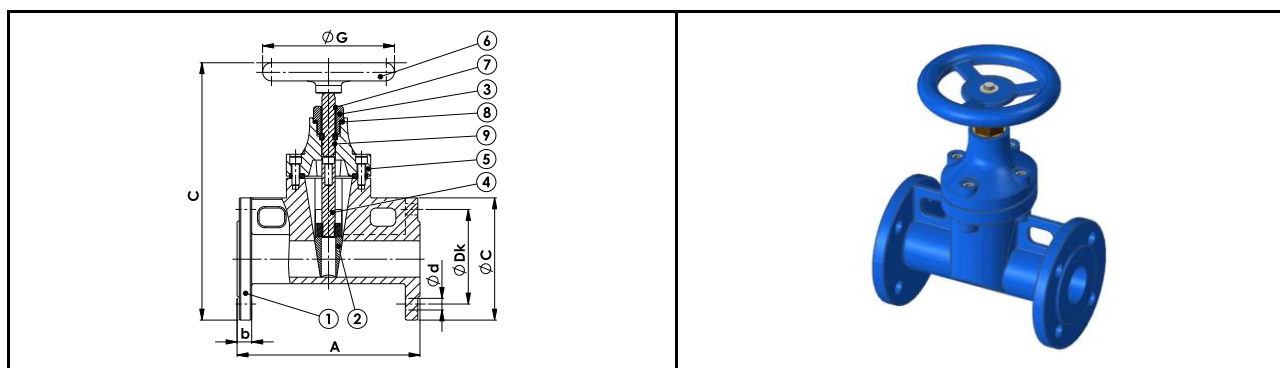

Working temperature 0 °C/70 °C

Materials

1	Body	Ductile Iron – GGG50
2	Wedge	Ductile Iron – GGG50 with EPDM coating
3	Stem nut	Brass
4	Stem	Stainless Steel – A304
5	Bonnet	Ductile Iron – GGG50
6	Handwheel	Ductile Iron – GGG50
7	Dust ring	EPDM
8	Sealing	NBR
9	O-Ring	NBR

PN10

Art. nr.	DN	A	ØC	ØDk	C	ØG	b	n-Ød	Weight (kg)
A030783	40	240	150	110	315	160	18	4-18	12,0
A030325	50	250	165	125	322	180	20	4-18	14,0
A030326	65	270	185	145	367	180	20	4-18	18,0
A030327	80	280	200	160	400	200	20	8-18	22,0
A040229	80*	280	200	160	400	200	20	4-18	22,0
A030328	100	300	220	180	440	250	22	8-18	29,0
A030329	125	325	250	210	585	280	22	8-18	48,0
A030333	150	350	285	240	602	280	22	8-23	58,0
A041038	200	400	340	295	690	340	24	8-23	90,0
A043877	250	450	405	350	814,5	350	28	12-23	130,0
A045454	300	500	460	400	934	400	29	12-23	170,0
A045455	350	550	520	460	1090	450	30	16-23	290,0
A045456	400	600	580	515	1180	450	30	16-28	320,0
A045457	500	700	715	620	1407,5	600	30	20-28	550,0

PN16

Art. nr.	DN	A	ØC	ØDk	C	ØG	b	n-Ød	Weight (kg)
A030783	40	240	150	110	315	160	18	4-18	12,0
A030325	50	250	165	125	322	180	20	4-18	14,0
A030326	65	270	185	145	367	180	20	4-18	18,0
A030327	80	280	200	160	400	200	20	8-18	22,0
A040229	80*	280	200	160	400	200	20	4-18	22,0
A030328	100	300	220	180	440	250	22	8-18	29,0
A030329	125	325	250	210	585	280	22	8-18	48,0
A030333	150	350	285	240	602	280	22	8-23	58,0
A030330	200	400	340	295	690	340	24	12-23	90,0
A030331	250	450	405	355	822	400	26	12-27	130,0
A030332	300	500	460	410	935	400	28	12-27	175,0
A034756	350	550	520	470	1350	450	28	16-27	270,0
A045458	400	600	580	525	1180	450	30	16-31	320,0
A041817	500	700	715	650	1407,5	600	30	20-34	569,0

Notes

Face to face dimensions conform to DIN3202 F5.

Article numbers for DN40–DN150 are the same for PN10 and PN16 and are always declared as PN16.

*Special: available with 4 holes on flanges.

