


GATE VALVE – METAL SEATED – FLAT BODY – NON RISING STEM – F4
DN40–DN300

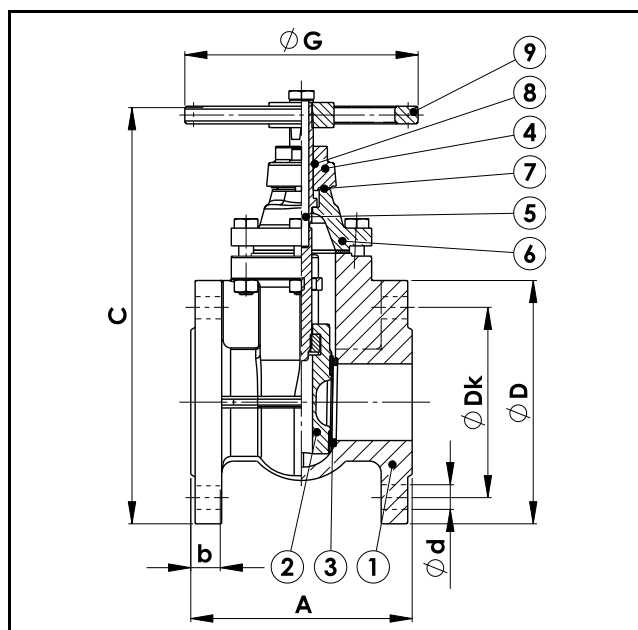

Working temperature 0 °C/90 °C

Materials

1	Body	Cast Iron – GG25
2	Wedge	Cast Iron – GG25
3	Body seat ring & disc seat ring	Brass
4	Stem nut	Brass
5	Stem	Stainless Steel – A304
6	Bonnet	Cast Iron – GG25
7	O-Ring	EPDM
8	Packing	Graphite
9	Handwheel	Cast Iron – GG25

PN10

Art. nr.	DN	A	ØD	C	ØDk	ØG	b	n-Ød	Weight (kg)
A020680	40	140	150	320	110	130	18	4-18	9
A011395	50	150	165	354	125	130	20	4-18	11,5
A012217	65	170	185	396	145	130	20	4-18	14,5
A011396	80	180	200	440	160	150	20	8-18	19
A011397	100	190	220	470	180	185	22	8-18	25
A012218	125	200	250	559	210	185	22	8-18	35
A012219	150	210	285	610	240	195	22	8-23	48
A061132	200	230	340	725	295	225	24	8-23	65
A076641	250	250	395	888	350	245	28	12-23	105
A076640	300	270	445	972	400	285	28	12-23	140

Flanged PN16, max. working pressure 10bar

Art. nr.	DN	A	ØD	C	ØDk	ØG	b	n-Ød	Weight (kg)
A020680	40	140	150	320	110	130	18	4-18	9
A011395	50	150	165	354	125	130	20	4-18	11,5
A012217	65	170	185	396	145	130	20	4-18	14,5
A011396	80	180	200	440	160	150	20	8-18	19
A011397	100	190	220	470	180	185	22	8-18	25
A012218	125	200	250	559	210	185	22	8-18	35
A012219	150	210	285	610	240	195	22	8-23	48
A012220	200	230	340	725	295	225	24	12-23	65
A029903	250	250	405	888	355	245	26	12-27	105
A029904	300	270	460	972	410	285	28	12-27	140

Notes

Face to face dimensions conform to DIN3202 F4.

