


SWING CHECK VALVE

DN40–DN300

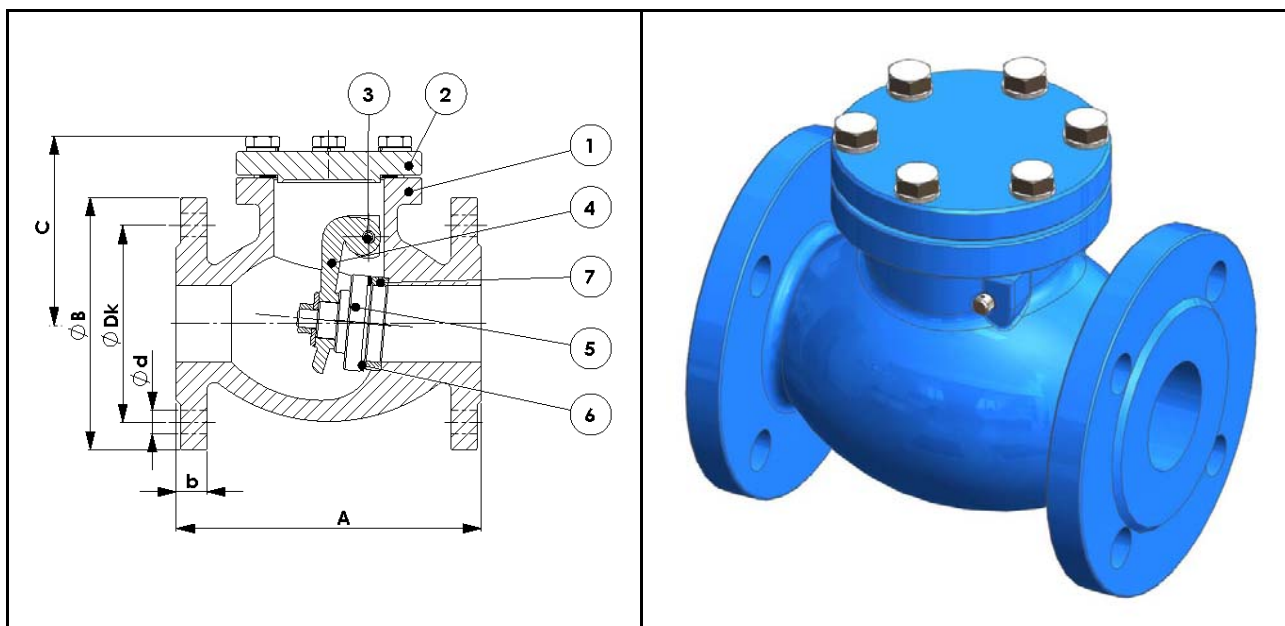

Working temperature 0 °C/120 °C

Materials

1	Body	Cast Iron – GG25
2	Bonnet	Cast Iron – GG25
3	Hanger Pin	Brass
4	Hanger	Ductile Iron – GGG40
5	Disc	Cast Iron – GG25
6	Disc Ring	EPDM
7	Body Ring	Brass

PN16

Art. nr.	DN	A	ØB	b	C	ØDk	n-Ød	Weight
A031146	40	180	150	18	118	110	4-18	7,0
A030846	50	200	165	20	120	125	4-18	11,6
A031147	65	240	185	20	125	145	4-18	17,5
A031148	80	260	200	22	147	160	8-18	21,4
A030855	100	300	220	24	158	180	8-18	37,0
A030854	125	350	250	26	188	210	8-18	56,2
A030853	150	400	285	26	193	240	8-23	72,4
A030852	200	500	340	30	250	295	12-23	122,7
A031548	250	600	405	32	300	355	12-27	198,0
A031549	300	700	460	32	342	410	12-27	292,0

Notes

Face to face dimensions conform to DIN3202 F6.

