


SILENT CHECK VALVE
DN50–DN300

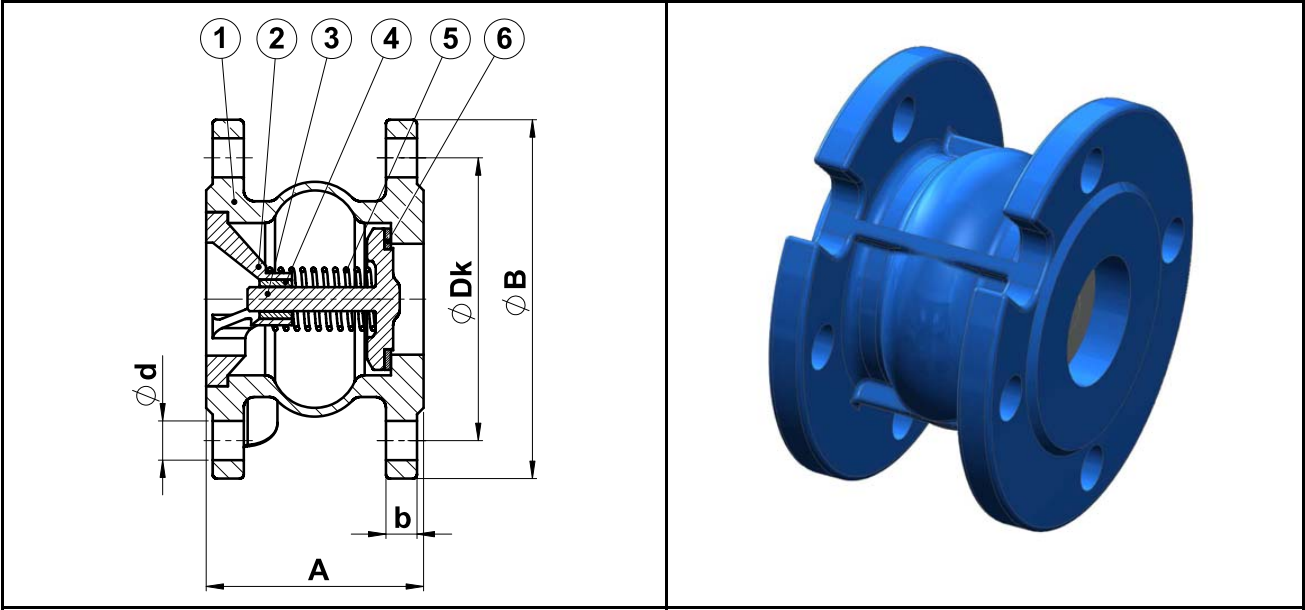

Working temperature 0 °C/100 °C

Materials

1	Body	Cast Iron – GG25
2	Guide	Cast Iron – GG25
3	Guiding stem	Cast Iron – GG25
4	Bushing	Brass
5	Spring	Stainless Steel – A304
6	Seal	EPDM

PN16

Art. nr.	DN	A	ØB	ØDk	b	n-Ød	Weight (kg)
A002206	50	100	165	125	18	4-18	5,7
A002207	65	120	185	145	20	4-18	8,7
A002208	80	140	200	160	20	8-18	10,8
A002209	100	170	220	180	22	8-18	13,5
A002210	125	200	250	210	24	8-18	21,0
A002211	150	230	285	240	26	8-18	30,0
A002212	200	300	340	295	26	12-23	49,0
A031285	250	370	405	355	30	12-23	73,3
A043384	300	410	460	410	32	12-27	131,0

