


BALL CHECK VALVE – FLANGED **DN50–DN200**

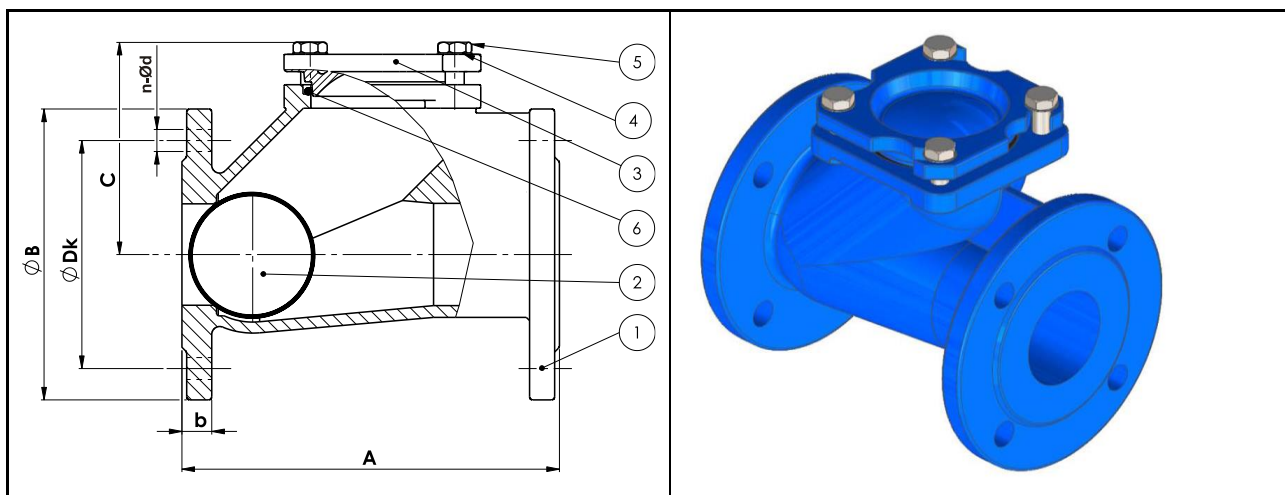

Working temperature 0 °C/70 °C

Materials

1	Body	Ductile Iron – GGG40
2	Ball	Aluminium NBR wrapped (DN50 – DN150) Steel NBR wrapped (DN200)
3	Bonnet	Ductile Iron – GGG40
4	Washer	Carbon Steel Zinc plated
5	Bolt	Carbon Steel Zinc plated
6	O-Ring	NBR

PN16

Art. nr.	DN	A	ØB	C	ØDk	b	n-Ød	Weight (kg)
A036460	50	200	165	109	125	20	4-18	7,4
A036461	65	240	185	130	145	20	4-18	11,0
A036462	80	260	200	147	160	22	8-18	15,0
A036463	100	300	220	186	180	24	8-18	22,0
A036464	125	350	250	215	210	26	8-18	34,0
A036465	150	400	285	250	240	26	8-22	45,5
A036466	200	500	340	343	295	30	12-22	87,0

Notes

Face to face dimensions conform to DIN3202 F6.

