


DIRT STRAINER

DN15–DN300

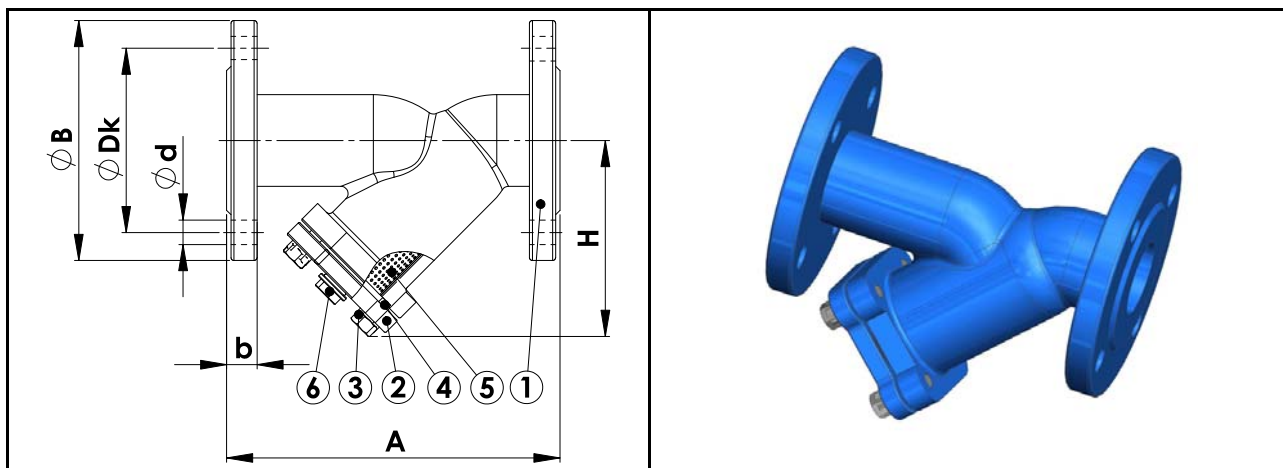

Working temperature 0 °C/120 °C

Materials

1	Body	Cast Iron – GG25
2	Bonnet	Cast Iron – GG25
3	Bolt	Galvanized Steel
4	Gasket	Graphite Steel
5	Wire mesh	Stainless Steel – A304
6	Plug	Galvanized Steel

PN16

Art. nr.	DN	A	ØB	b	ØDk	n-Ød	H	Weight
A002256	15	130	95	14	65	4-14	72	2,1
A002255	20	150	105	16	75	4-14	78	2,9
A002254	25	160	115	16	85	4-14	88	3,8
A002253	32	180	140	18	100	4-18	100	5,4
A002252	40	200	150	18	110	4-18	125	7,0
A002251	50	230	165	20	125	4-18	138	9,8
A002250	65	290	185	20	145	4-18	178	13,0
A002249	80	310	200	22	160	8-18	190	20,0
A002248	100	350	220	24	180	8-18	230	26,2
A002247	125	400	250	26	210	8-18	250	39,4
A002246	150	480	285	26	240	8-23	300	50,0
A002245	200	600	340	30	295	12-23	370	95,4
A012214	250	730	405	32	355	12-27	485	127,0
A012215	300	850	460	32	410	12-27	565	198,0

Wire mesh

DN15–DN50: density 0,8 mm, wire thickness 0,4 mm.

DN65–DN125: density 1,2 mm, wire thickness 0,9 mm.

DN150–DN 300: density 1,7 mm, wire thickness 1,0 mm.

Notes

Face to face dimensions conform to DIN3202 F1.

